

SPECIFICATION

Draftec

Reviewed by

Approved by

SW	F	*	*	*	*	*	*	*	*	*	*	*
SW	LED Strip	LED type	Leds's color			Led Qty/0.5M	IP Grade	Length	C	Operating voltage	PCB width	
		3528	W	Warm white		30	WF0 IP20	5M	Constant	00 Special	K008	8mm
		5050	N	Nature white		48	WF1 IP66	2.5M	current	05 DC5V	K010	10mm
		2835	C	Cold white		60	WF2 IP65	2.525M	LED strip series	12 DC12V	K015	15mm
		3014	RGB	Red&Green&Blue		72	WF3 IP67			24 DC24V	K020	20mm
		2216	Z	Chasing		120	WF4 IP68			36 DC36V	K012	12mm
			RGBW	Red&Green&Blue&Warm white						42 DC42V		
		5730	RGBN	Red&Green&Blue&Nature white					48 DC48V			
			RGBC	Red&Green&Blue&Cold white								
			CTA	Color temperature adjustable								
			RGBCTA	RGB+Color temperature adjustable								

5M/FCOB constant voltage Led strips/

480 pcs chip/meter/DC24V/IP20/8mm

Big beam angle, no dark area, flexible line source with good heat dissipation.

Inverted COB gold-free technology.

Ra>90, cuttable and re-connectable.

Step length:50mm,double PCB,reduce the voltage drop.

IP grade: IP20、IP65、IP66、IP67

CUL/CE /ROHS certification.



Application:

Widely used in hotels、shopping malls、furniture、cabinets、shelf, as decoration lighting, direct lighting or indirect lighting.

Installation:

3M Adhesive

Warranty:

3 years



Optical&Electrial

Product Model	Color	CCT (K)	Ra	Beam angle (°)	Lumen (lm/m)	Efficiency (lm/W)	Voltage (V DC)	Current (mA/m)	Power (W/m)
SW-FCOBW240-WF0	WW	2700	≥90	180	1067	97	24	417	11
SW-FCOBW240-WF0	WW	3000	≥90	180	1089	99	24	417	11
SW-FCOBN240-WF0	NW	4000	≥90	180	1155	105	24	417	11
SW-FCOBC240-WF0	CW	6500	≥90	180	1298	118	24	417	11

5M/FCOB constant voltage Led strips/

480 pcs chip/meter/DC24V/IP20/8mm

Other features:


Product Model	IP grade	Working environment (°C)	Storage environment (°C)	Length (m)	Max connection Length (m)	LED Qty (pcs/m)	N.W (g/Roll)
SW-FCOBX240-WF0	IP20	-25~+45	-30~+80	5	4	480	86.5

Notes:

- Testing environment temperature: 25±2℃ .
Above data confirmed on the basis of 1M sample,Ra90, IP20.
Different IP grade with different Data.
- Mark"—"means no testing requirement.

Demensions:


SW-FCOBX240-WF0-5M-24-K008

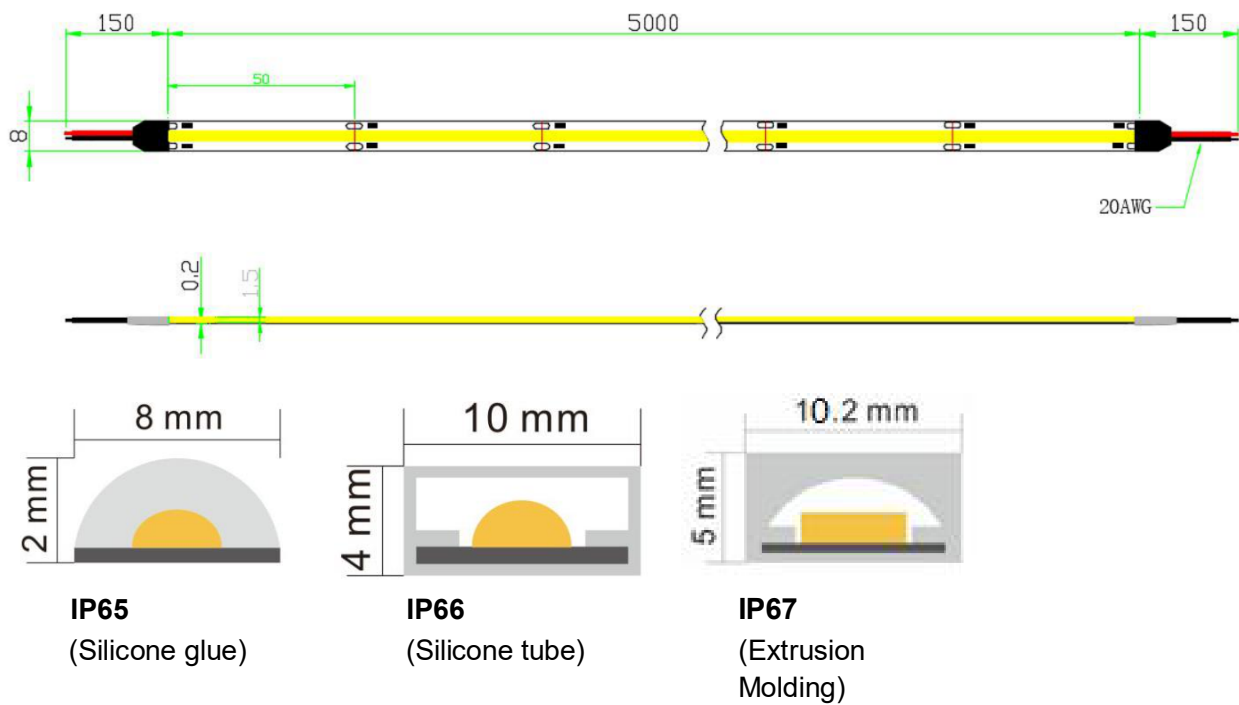


5M/FCOB constant voltage Led strips/

480 pcs chip/meter/DC24V/IP20/8mm

Electrial principle:

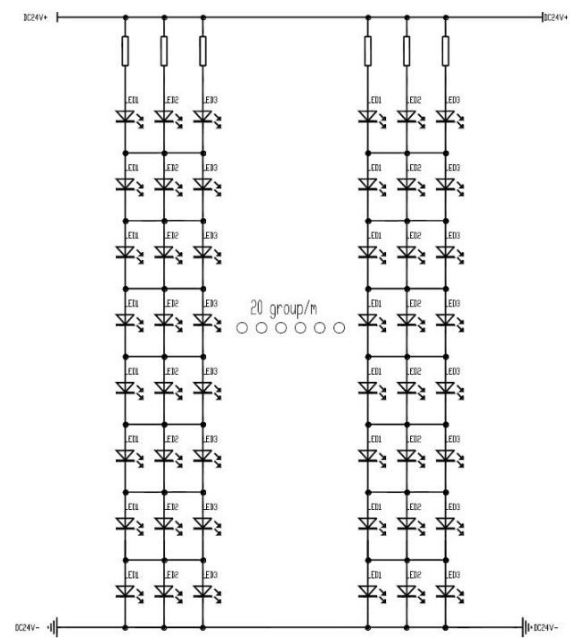

Optical/Lux graph :

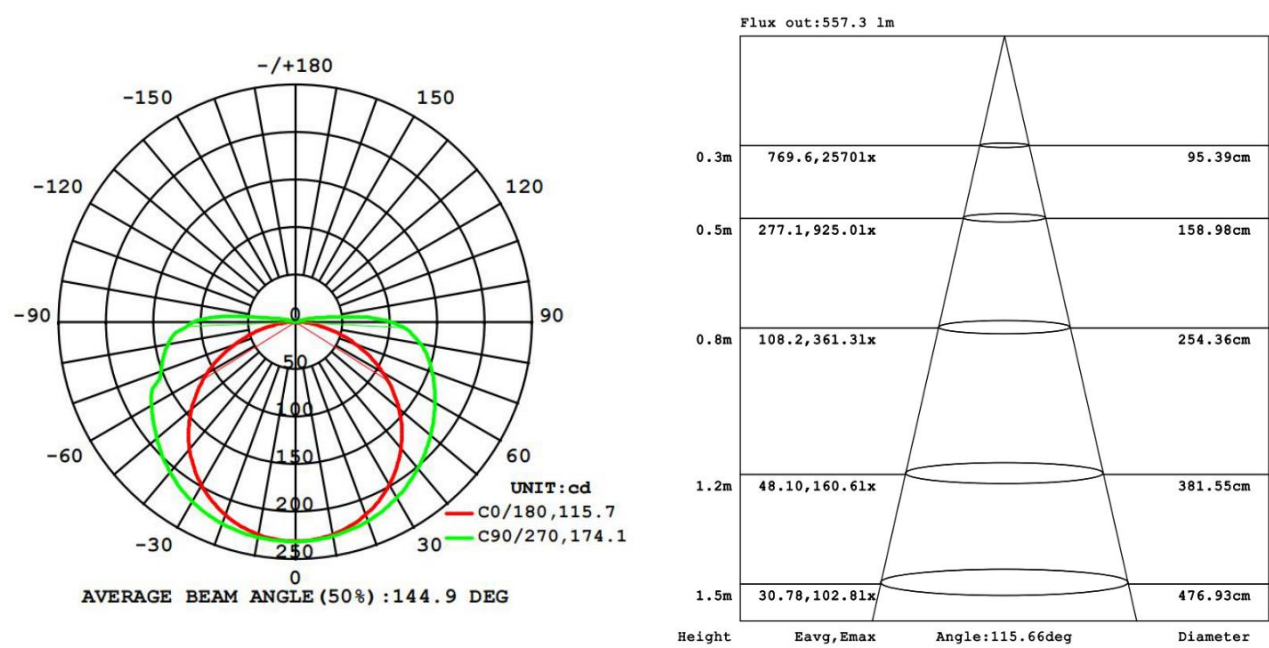

5M/FCOB constant voltage Led strips/


480 pcs chip/meter/DC24V/IP20/8mm

Package details:

Model	carton	Qty/Roll(m)	Qty/Carton(m)	Total Qty(m)	G.W(Kg)	size(mm)
SW-FCOBX240-WF0	Inner box	/	/	/	/	/
	outer box	5	500	500	11.4	L410*W410*H260

Package:


SW-FCOBX240-WF0-5M-24-K008

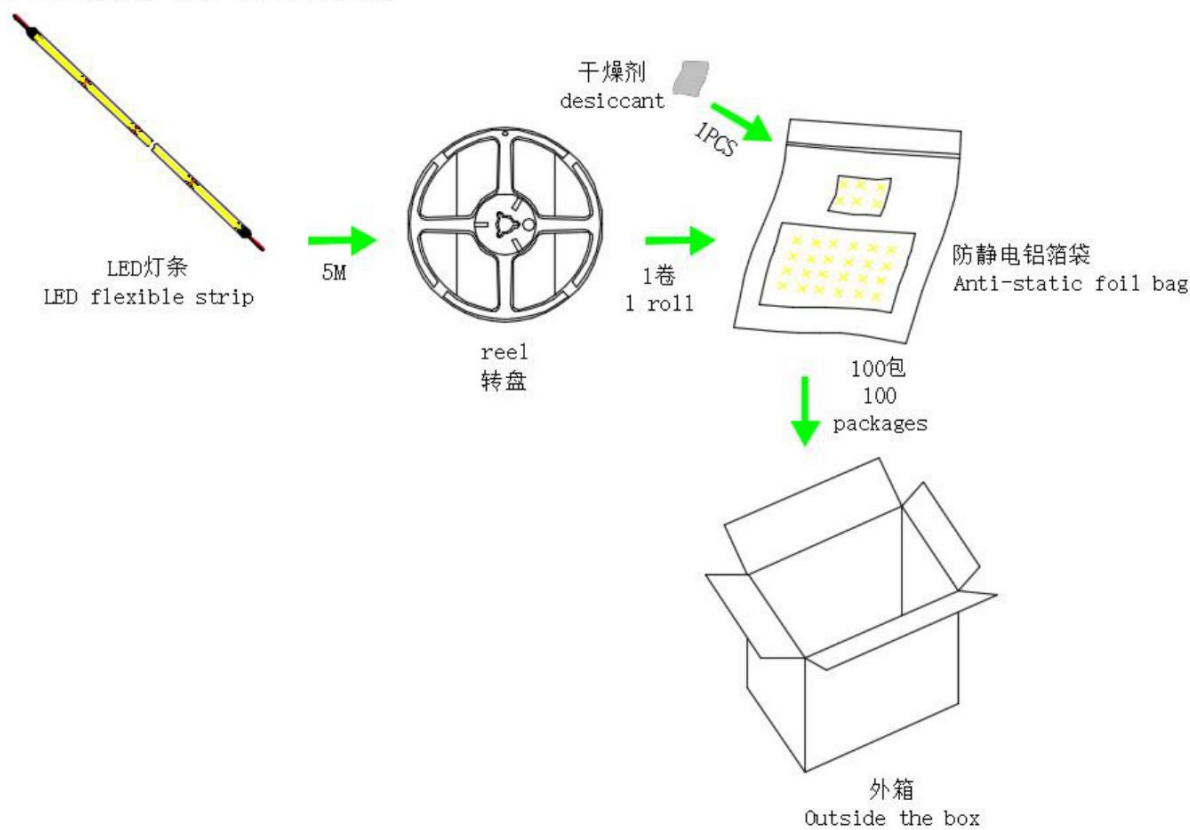

5M/FCOB constant voltage Led strips/

480 pcs chip/meter/DC24V/IP20/8mm

Schematic:

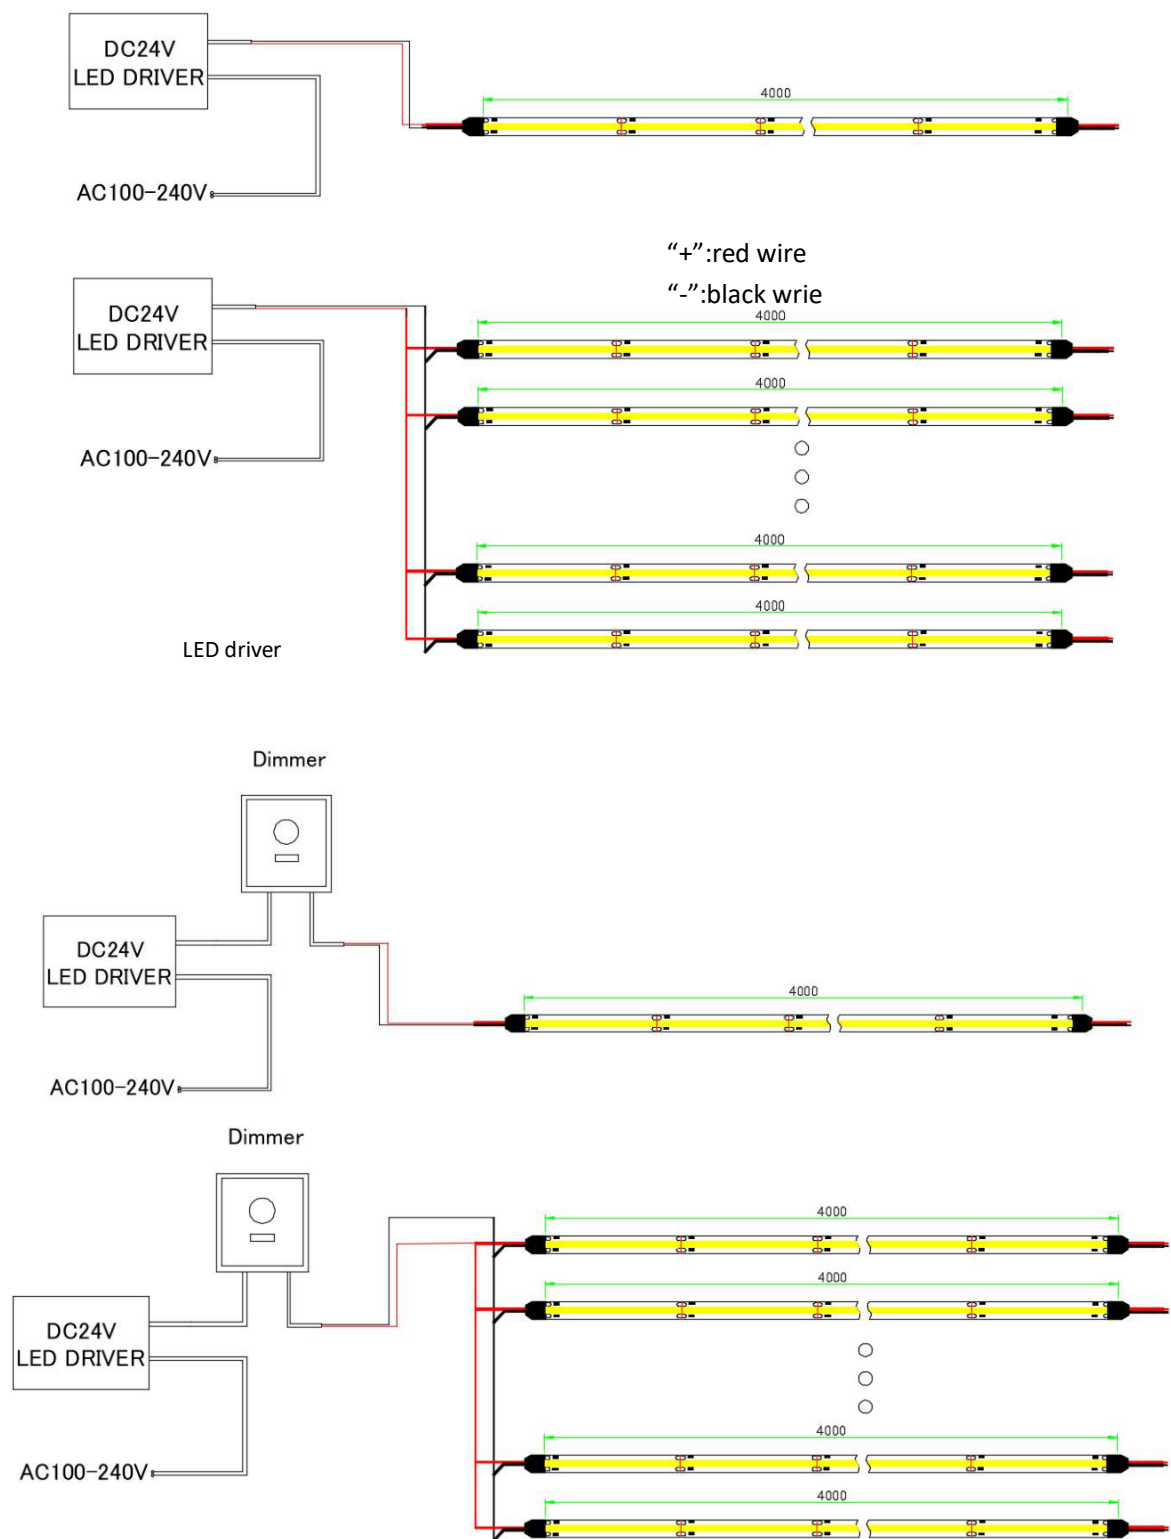

5M/FCOB constant voltage Led strips/

480 pcs chip/meter/DC24V/IP20/8mm


Starwire suggested the maximum connectable length of the strip is 4 meters

(PS: Strip positive connect to the driver positive,
Strip negative connect to driver negative)

Product and needed tools:




Product
Led strip

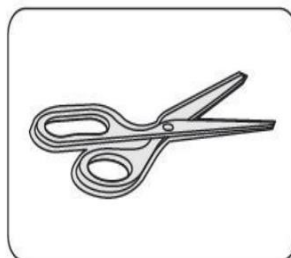


Needed tools
scissor

Installation steps:

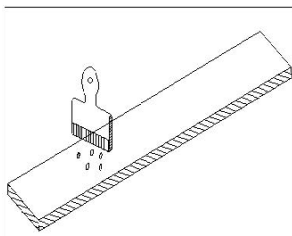


Clean the installation surface


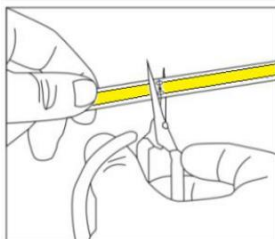


Measure the length you need to install, cut at the nearest scissor mark line.

For the left led strip, weld at the next scissor mark to connect with other connection wire.

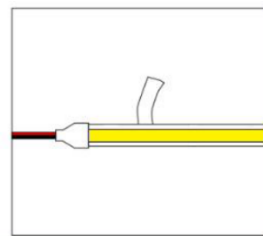

Do not pull the whole led strip from the back release paper by one time. No press on the leds.

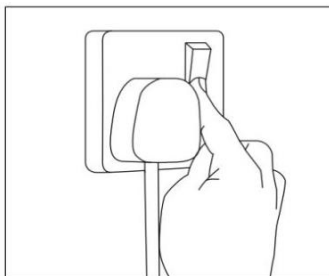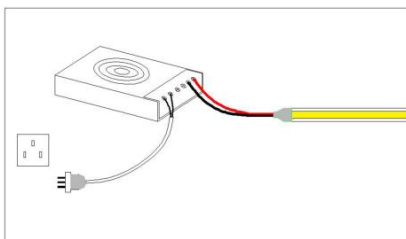


5M/FCOB constant voltage Led strips/


480 pcs chip/meter/DC24V/IP20/8mm

Connect the led strip wire to the driver output side (Positive to positive, negative to negative.)
Connect the driver input side to power-supply.


Switch on and enjoy.

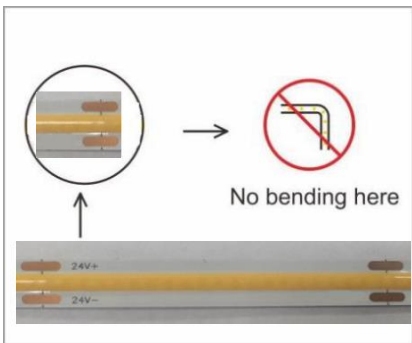

No bending
at the point of leds

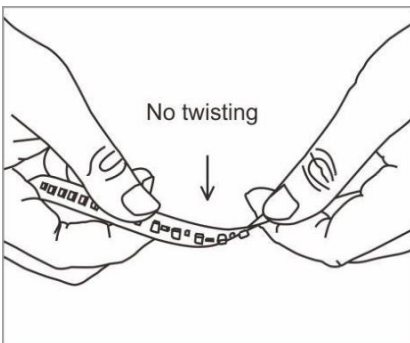

No contortion
of the led strip.

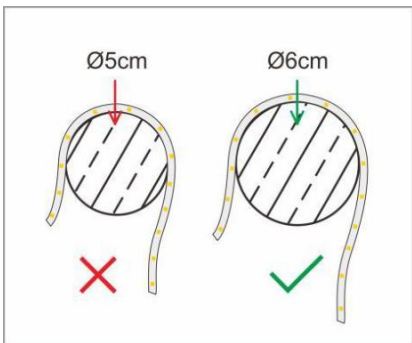

No bending
with Diameter<6cm

Usual problem with solutions:

Problem	Possible reasons	solution
All fail	No power supply	Give power supply.
	Automatic switch-off because of the open circuit and short circuit	Solve the problem, switch on again.
Part fail	Wrong connection (positive connect with negative)	Check and get right connection.
	Part power-supply fail	Check and make sure the power supply well.
	Part circuit error	
	Part wrong connection(positive connect negative)	Check and get right connection.

5M/FCOB constant voltage Led strips/

480 pcs chip/meter/DC24V/IP20/8mm

	overload of the driver	Use higher-power driver.
Inconsistent brightness or insufficient brightness	Too big power consumption of the switch, or unbalanced power consumption from different strip series.	Keep the strip working voltage is more or less 5% than the Rated voltage. 1.shorten the connection cable length, or change to thicker cable. 2.Make sure the strip quantity is less than the allowed connection quantity.Keep the led strip quantity of each series similar) .
	Too many Led strips connection	Adjust the led strip quantity, make sure sufficient power supply.
LED flash	Poor welding connection of wires	Check,find and solve it.
	switch problem	Change to right switch.

Statements :

For safety, the product wire should be moved and replaced by the manufacturer, agent or other authorized person.

Please refer to the product manual before installation.

Above-refered data is from our standard product. Please subject to your actual product data if there is difference.

Above-refered schematic diagrams are from our standard product. Please subject to your actual product data if there is difference.

In actual use,we suggest 80% consumption of the driver. Keep 20% as power to start the led strip.

For safety, no touch the AC terminal.

Any acidic or alkaline substance is forbidden.

No notice for updated of this product.

Starwire reserve the final interpretation of the specification.

