Model number: JM-T4

Products name: Single color knob LED dimmer





## **Product Description:**

The single led dimmer adopts advanced PWM control technology, adopt knob to control the dimmer, you could adjust light to the appropriate lighting brightness in accordance with your actual need, used to control a variety of constant voltage led single lamp

# **Technical Parameters**

Working temperature: -20-60°CSupply voltage: DC5V-24V

• Output: 1 channel

• Connection mode: Common anode

• Controller size: 65\*63\*35.5mm

• Net weight: 260g

• Static power consumption: <1W

• Output current: <30A

• Output power: 12V:< 360W; 24V:<720W

### **Interface Specifications:**


• Connect the load wire at first, following to connected the power wire; Please ensure short circuit can not occur between connecting wire before you turn on the power;

Adopt rotary button, its function as follows:



Rotate button to the right, brightness will be brighter, when you rotate it to the far right, the brightness is greatest. Rotate button to the left, brightness will be darker, when you rotate it to the far left, the light will be turned off.

## **Typical Applications:**

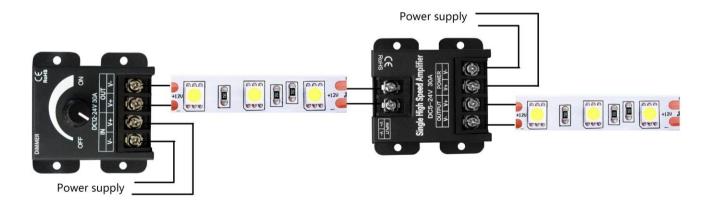



# **Cautions**

- 1. This products Input voltage is DC12V, other input voltage are not allowed.
- 2. Lead wire should be connected correctly, according to the wire color and the connecting diagram offers.
- 3. Overload are prohibited.